


Schalldämpfer - Kunststoff

Silencer - plastic

Silenziatore in plastica dinamico con materiale fonoassorbente

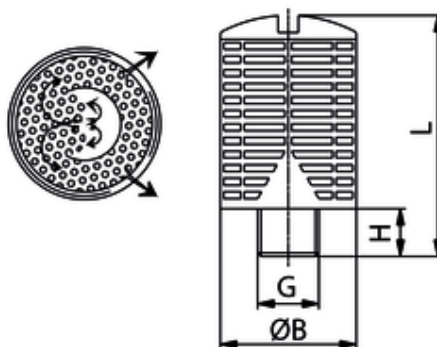

| ITV | G | ØB | H | L |
|--------|------|----|---|------|
| 303112 | G1/8 | 15 | 6 | 32,5 |

| | |
|---------------------------|---------------------|
| Material: | Kunststoff |
| material: | plastics |
| Materiale: | Plastica |
| Filterfeinheit | 36 µ |
| filter mesh: | 36 µ |
| Elemento filtrante: | 36 µ |
| Betriebsdruck: | max. 6 bar |
| working pressure: | max. 6 bar |
| Pressione di esercizio: | max. 6 bar |
| Betriebstemperatur: | -10 °C bis +70 °C |
| working temperature: | -10 °C up to +70 °C |
| Temperatura di esercizio: | da -10 °C a +70 °C |
| zyl. Gewinde: | DIN EN ISO 228 |
| cyl. threads: | DIN EN ISO 228 |
| Filettatura: | DIN EN ISO 228 |